


LINE AUDIO TRANSFORMERS

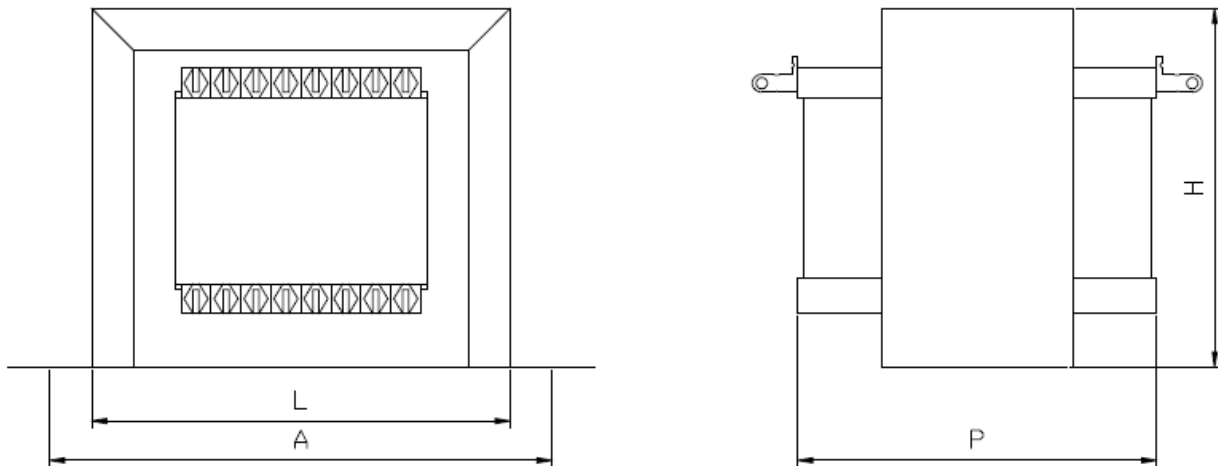

Technical data: 4-8 ohm and Output 100.V with power distribution

Frequency response: 80-15000 Hz (+/- 3 dB)

Reference regulations: EN 60065 (CEI 92-1)

Protection index: IP00

Ambient temperature: 35°C

Thermal insulation class: B (130°C)

The transformers are immersed in an insulating liquid

| POWER (W) | DIMENSIONS (mm) | | | FIX DISTANCE (mm) | WEIGHT (KG) |
|--------------|-----------------|----|----|-------------------|----------------|
| | L | H | P | A | |
| 10 | 62 | 51 | 55 | 71 | 0,50 |
| 30 | 62 | 51 | 65 | 71 | 0,75 |
| 60 | 77 | 64 | 72 | 90 | 1,15 |
| 120 | 86 | 76 | 87 | 101 | 1,80 |

The line transformers are made according to the European standards EN 60065 CEI 92-1.

They are used as impedance adapters inside the speakers with a wide frequency response.

Our products are entirely realised in Italy with first choice raw materials strictly selected in order to guarantee the best quality and safety.

Our Technical Department is qualified and prepared to satisfy all kind of demands including tailor made requests.