


POWER SUPPLY HI-FI TRANSFORMERS

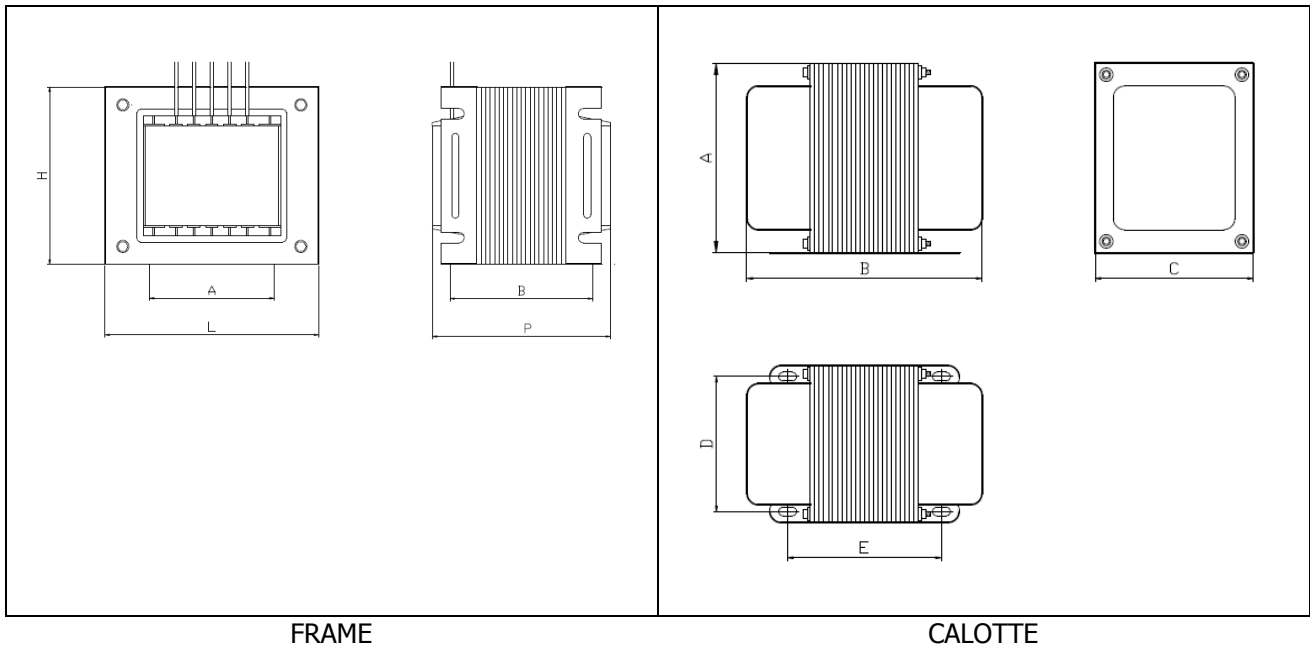

FRAME

CALOTTE

Technical data: Input 230.V at 50/60 Hz, shielding between primary and secondary, insulation 4.KV.
Power to 80, 120, 180, 240, 300, 400.VA.
Secondary output on request.

Reference regulations: EN 61558-1 (CEI 96-3)

Protection index: IP00

Ambient temperature: 35°C

Insulation class: II

Thermal insulation class: B (130°C)

The transformers are immersed in an insulating liquid.

Frame version	POWER (VA)	DIMENSIONS (mm)			FIX DISTANCE (mm)		WEIGHT (KG)
		L	H	P	A	B	
	80	88	74	80	56/75	60	2,1
	120	100	84	90	57/80	74	3,2
	180	124	104	85	70/100	64	4
	240	124	104	95	70/100	74	5
	300	124	104	105	70/100	84	6
	400	154	129	100	95/125	69	7,7

Calotte version	POWER (VA)	DIMENSIONS (mm)			FIX DISTANCE (mm)		WEIGHT (KG)
		A	C	B	D	E	
	80	88	75	104	60	65	2,1
	120	99	83	113	69	72	3,2
	180	123	104	114	80	68	4
	240	123	104	124	80	78	5
	300	123	104	134	80	88	6
	400	160	131	138	101	80	7,7

The power transformers Hi-Fi are manufactured in compliance with the European standards EN 61558-1 and CEI 96-3, American UL 506 and UL 1585 and Canadian legislations CSA 22.2 n ° 66.

They are composed by a primary network input at a frequency of 50/60 Hz and more secondary networks with a voltages that depend on the valve use.

Our products are entirely realised in Italy with first choice raw materials strictly selected in order to guarantee the best quality and safety.

Our Technical Department is qualified and prepared to satisfy all kind of demands including tailor made requests.